


External Dimensions

Servomotors without Gears

◆ SGM7J-A5, -01, and -C2

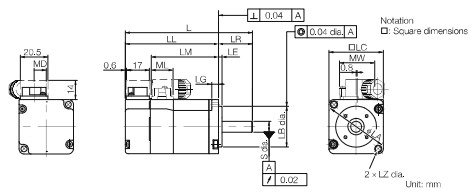

Model SGM7J-	L	LL	LM	Flange Dimensions						S	
				LR	LE	LG	LC	LA	LB		LZ
A5A□A2□	81,5 (122)	56,5 (97)	37,9	25	2,5	5	40	46	30 ^{±0,01}	4,3	8 ^{±0,01}
01A□A2□	93,5 (134)	68,5 (109)	49,9	25	2,5	5	40	46	30 ^{±0,01}	4,3	8 ^{±0,01}
C2A□A2□	105,5 (153,5)	80,5 (128,5)	61,9	25	2,5	5	40	46	30 ^{±0,01}	4,3	8 ^{±0,01}

Model SGM7J-	MD	MW	ML	Approx. Mass [kg]
A5A□A2□	8,8	25,8	16,1	0,3 (0,6)
01A□A2□	8,8	25,8	16,1	0,4 (0,7)
C2A□A2□	8,8	25,8	16,1	0,5 (0,8)

Note: 1. The values in parentheses are for Servomotors with Holding Brakes.
2. Refer to the following section for detailed shaft end specifications.
■ Shaft End Specifications (page 17)

■ Specifications of Options

- Oil Seal

